

Product: **Presence Sensor Slave Unit**

Catalogue No: **PS465S**

Description: Slave Unit for PS465 Indoor Presence Sensor

**Theta**

### Key Features

- Designed for Lighting Automation
- Ceiling Recessed Mounting
- Includes 1m long Signal Cable

### Description

For indoor use only, this slave unit can be added to a PS465 circuit to extend sensor detection zone.

### Specifications

Input Voltage: 230V  $\sim \pm 10\%$  50/60 Hz

Load: Resistive: 8 Amp

Inductive: Max 3.5 Amp

Light Switch-off: 10 seconds to 30 minutes light switch-off delay

Load on time: 5 minute, 10 minute, 15 minute &  $\infty$

Protection Rating: Detector: IP40

Power Box: IP20

Detection Range: 6m diameter at a height of 2.4m

Detection Angle: 0  $\sim$  360°

Lux: 10  $\sim$  2,000 Lux

Operating Temp: 0°C  $\sim$  +45°C

Installation: Recessed Ceiling Mounting

To go with: **PS465** 1 Channel Presence Sensor Unit

Accessories: **RJ-12(6m)** Slave Connection Cable



Product: **Presence Sensor Slave Unit**


Catalogue No: **PS465S**

Description: Slave Unit for PS465 Indoor Presence Sensor


**Theta**



**Detection Range**

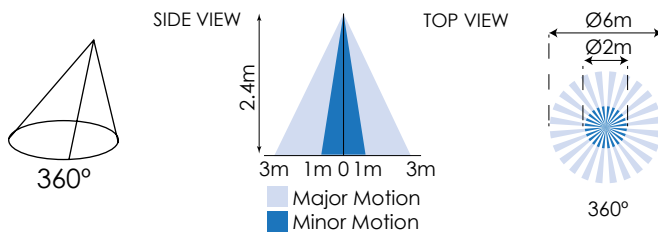

**Scale Drawing**

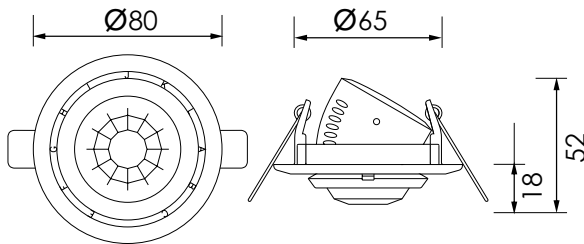

**Wiring Diagram**

